POLYTUNER SCHEMATIC

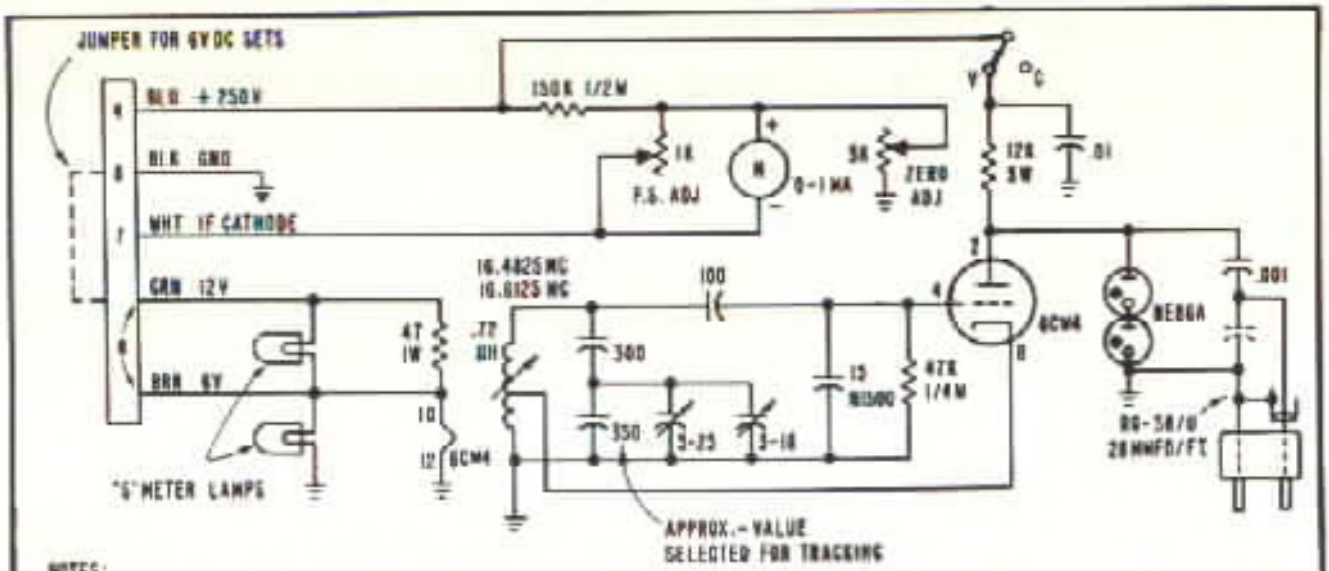

NOTES:

1. RESISTOR VALUES ARE IN OHMS, MULTIPLIER K=1,000.
2. DECIMAL CAPACITOR VALUES GIVEN IN MICROFARADS; DIGITAL VALUES GIVEN IN MICRO-MICROFARADS.

SCHEMATIC: POLYTUNER			
MANUFACTURED BY: POLYTRONICS LABORATORIES INC. 388 GETTY AVENUE CLIFTON, NEW JERSEY 201-772-1334	ENG: D. PRYCE KBG1889		
	CKD BY: W.V. HARGREAVES 2WO213		
	APP BY: H.R. LEVINE 2W1483		
REVISIONS: B 12K WAS 27K 2W, 5K POT WAS 1K, 2ND NE86 ADDED	DWN BY: R.E. TUCKER	DWG NO. PT14	ISSUE B
	DATE: 8-22-62		

For the Novice,
Tech or
General Class
Amateur

POLY COMM 6

Dual Nuvistor,
double conversion
6 meter transceiver with VFO, Squelch and ANL.
Write for specs.