

new

HUSTLER[®]

the real performer! specifically for repeater

...or any TWO-METER FIXED STATION OPERATION

With **6** db—
db—

—Gain compared to ½ wave dipole
—FCC accepted for repeater application

mechanical

Vertical element—117"
long, 1-1/8" telescopic
to 3/8" OD high
strength aluminum

Radials—four, 21" x 3/16"
OD aluminum rod

Connector—SO-239

Wind load—26 pounds
at 100 mph.

Wind survival—100 mph.

Completely self-supporting

Mounting—fits vertical
pipe up to 1-3/4" OD

electrical

6 db. gain over ½ wave dipole

Omnidirectional radiation pattern

Maximum radiation—at horizon

50 ohm feed impedance

Field adjustable—140-150 MHz

SWR at resonance—1.2:1 measured at antenna

Bandwidth—6 MHz for 2:1 or better SWR

Power—one kilowatt FM

Feed—Shunt with D.C. grounding

Radiator—5/8 wave lower section, ¼ wave
phasing, 5/8 wave upper section


The gain you gain—you gain
transmitting and receiving—
get both with Hustler!

Available from
all distributors
who recognize the best!

THE HUSTLER MASTER GAINER

MODEL G6-144-A

Shipping Wt.: 6.8 lbs. Price: \$52.95

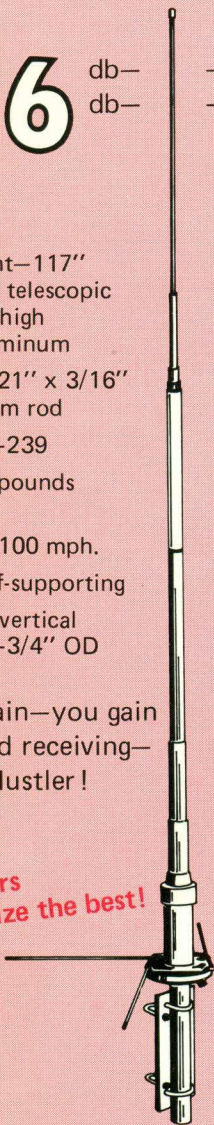

new
tronics
corporation

15800 commerce park drive,
brook park, ohio 44142

Exporter: Roburn Agencies, Inc.,
New York, N.Y.